


L RANGE



■ THE BEST PERFORMANCE

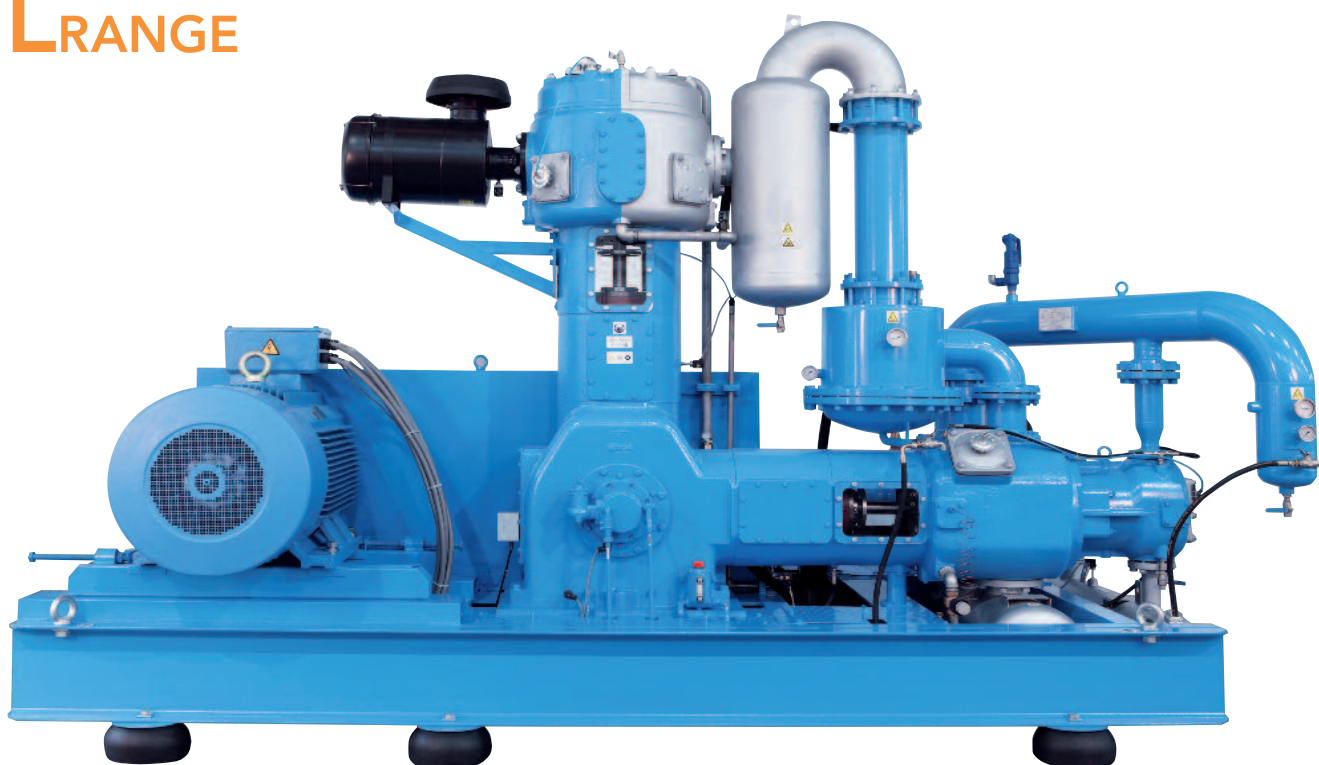

RANGE OF CAPACITIES

HIGH PRESSURE OIL FREE PET COMPRESSORS



AF COMPRESSORS

L RANGE

Model	Capacity FAD m ³ /h	Capacity CFM	Motor Power kW
L4	790	465	132
L4A	960	565	160
L5	1200	706	200
L5A	1500	883	250
L6	1760	1036	280
L6A	1940	1142	315
L6B	2170	1277	355



Capacity FAD, Free Air Delivery according to ISO 1217. 25-40 bar nominal pressure, equipment up to 44 bar.
Air quality according to ISO 8573-1 2.4.1

■ MORE VOLUME FOR SAME POWER

Increased High Pressure air capacity FAD.
Decreased specific shaft power.


■ NEW DESIGN AND DEVELOPMENT

- ▶ Increased internal volume in the interconnecting pipework with reduced pulsation losses. New separator and intercooler design, increased efficiency.
- ▶ New piston / Cylinder assemblies with reduced losses. New piston rings with optimized design, increased output capacity.
- ▶ Optimized package and coating, integrated equipments ; drains, oil cooler...



Airtag Engineering AG
Drucklufttechnik und Anlagenbau

Hölzliwisenstrasse 5a
CH-8604 Volketswil
Tel +41 (0)43 399 30 20
Fax +41 (0)43 399 30 21
www.airtag.ch, mail@airtag.ch

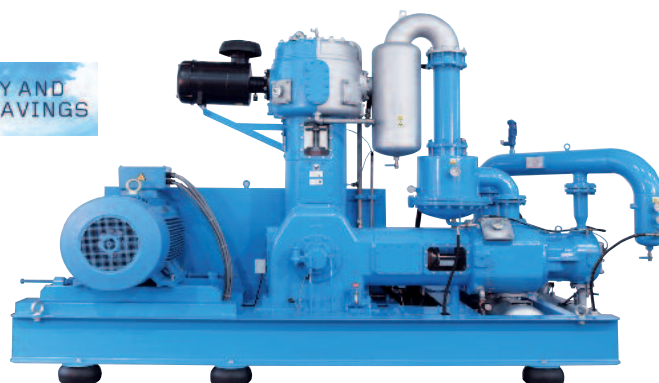

Technical modification without prior notice.

